

MP36-2

MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

Main Tecnical Data

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	600

Performance curve

Graph

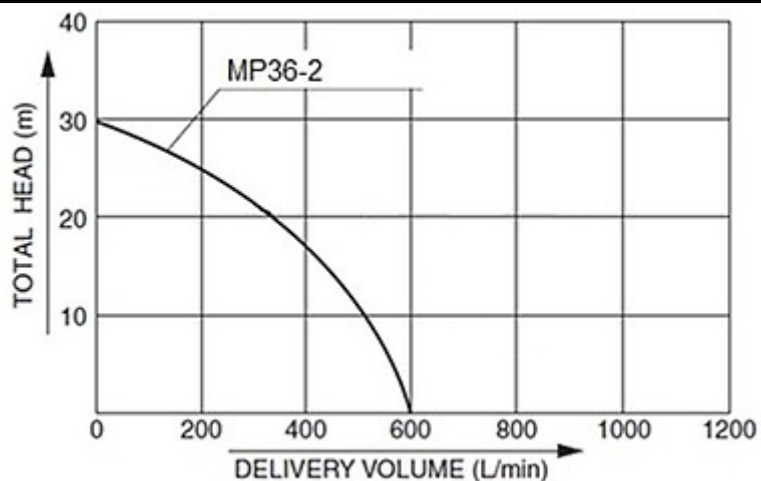

Engine specifications

Engine manufacturer	Honda	
Nr. of cylinder and disposition	1 inclination angle	
Displacement	cm ³	118
Fuel	Petrol	
Starting system	Recoil	

Pump specifications

Manufacturer	KOSHIN	
Inlet pipe diameter	'	2
Outlet pipe diameter	'	2
Max Solid Size	mm	-
Material for mechanical seal	Carbon Ceramic	
Material for impeller	Cast Iron	
Material for volute	Aluminum Die Cast	

Dimensional data

Length	(L) mm	470
Width	(W) mm	365
Height	(H) mm	390
Dry weight	Kg	26

Consumption, running time and noise

Fuel tank capacity	l	2.0
Running time	h	2.0
Noise level at 7 m	dB(A)	78
Guaranteed noise level (LWA)	dB(A)	103



General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		Standard
Oil guard		Standard



Accessories

Inlet pipes - length 8m	2"
Inlet pipes - length 25m	2"
Outlet pipes - length 10m	2"
Outlet pipes - length 50m	2"
Outlet pipes - length 100m	2"



The information is aligned with the Data file at the time of download. Printed on 28/11/2019 (ID 697)

©2019 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.
Specifications subject to change without notice

